

Applications:

to automotive fluids.

Rear main bearing cap split line, damper keyway sealing, differential cover, intake end seals, OHC cap, oil pan corner seals, oil pan gasket, side cover plate, thermostat housing, timing cover, transmission pan, valve cover gasket, vibration damper, water pump cover gasket and intake manifolds.

to increase reliability. It is permanently flexible and stable at temperature

of between -80 °F to 650 °F (-62 °C to 343 °C). It is also highly resistant



| Item Code | Content | Inner Box | Carton Quantity |
|-----------|-----------------------|-----------|-----------------|
| VT-151 | 85 g Tube Carded | 12 | 144 / Carton |
| VT-151SE | 70 g Tube Carded | 12 | 144 / Carton |
| VT-158 | 300 g Cartridge | - | 24 / Carton |
| VT-159 | 32 g Tube Carded | 12 | 144 / Carton |
| VT-176 | 15 g x 10 Tube Carded | 12 | 48 / Carton |








Features

- High temperature resistance up to 650 °F (343 °C)
- Forms leak-proof gaskets in seconds
- Hi-temp heavy duty applications
- Remains flexible and durable



CYLINDER HEAD

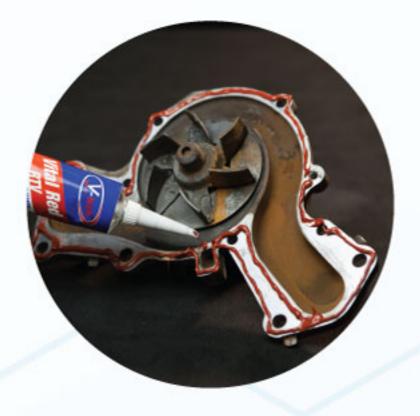

WATER PUMP



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.



sales@vitaltechnical.com







