



Formulated For The Professionals

# VT-750 / VT-750S Timberbond 750

## Water-based Wood Flooring Adhesive

Timberbond 750 is a fast setting water-based adhesive featuring ultra-high solid content (low water content) thus suitable for bonding of various types of very moisture sensitive timber in wood flooring applications. It is an easily trowelable thixotropic paste available in beige color. It dries to form a strong bond between timbers, and is resistant to normal hygrometric movements of wood and the thermal expansion of substrates.

### Applications:

Ideal for the bonding of very moisture sensitive timber in wood flooring applications, including parquet, industrial parquet and floorboards of all types of wood, multi-layer pre-finished parquet of small format. It may be used on cement-based screeds, wooden substrates, shipboard panels, Masonite panels etc.

### Applicable Test / Standard:

- 1. Low VOC - USEPA Method 24 under SCAQMD rule 1168


Available color: Brown

Item Code	Content	Carton Quantity
VT-750PP20K	20.0 kg Pail	-
VT-75020K	20.0 kg Carton	-
VT-750S	600 ml Sausage	20 / Carton



### Features

- Fast setting
- Ultra-high solid content (Low water content)
- Bonds moisture sensitive timber
- Notched trowel ridges will hold firm

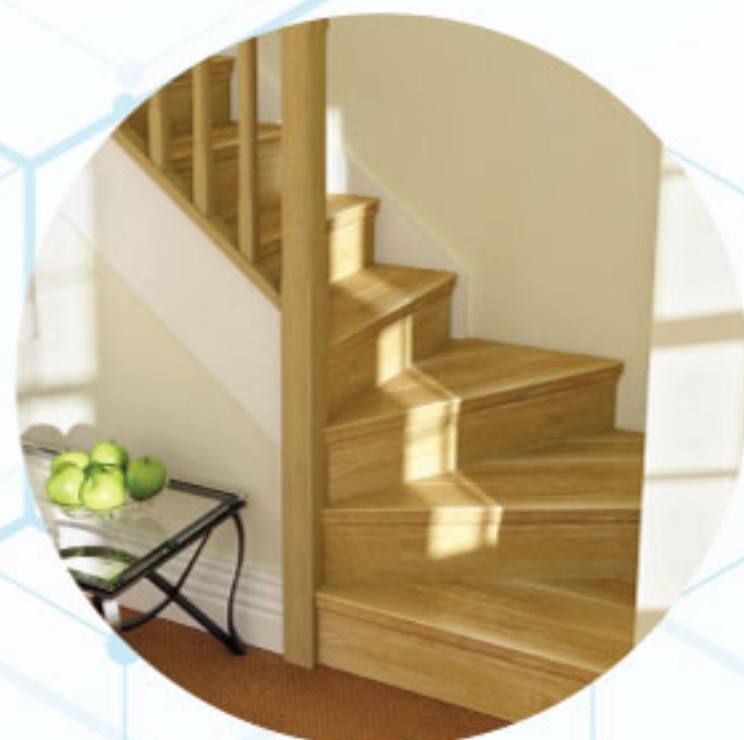

STAIRCASE



SOLID WOOD



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP

