



Formulated For The Professionals
Adhesives & Sealants

VT-750 / VT-750S Timberbond 750

Water-based Wood Flooring Adhesive

Timberbond 750 is a fast-setting water-based adhesive featuring ultra-high solid content (low water content) thus suitable for bonding of various types of very moisture sensitive timber in wood flooring applications. It is an easily trowelled thixotropic paste available in beige color. It dries to form a strong bond between timbers, and is resistant to normal hygrometric movements of wood and the thermal expansion of substrates.

Applications:

deal for the bonding of very moisture sensitive timber in wood flooring applications, including parquet, industrial parquet and floorboards of all types of wood, multi-layer pre-finished parquet of small format. It may be used on cement-based screeds, wooden substrates, shipboard panels, Masonite panels etc.

Applicable Test / Standard:

1. Leadership in Energy and Environmental Design (LEED) v4.1 EQ compliant
2. Low VOC - USEPA Method 24 under SCAQMD Rule 1168

Available color: Brown

Item Code	Content	Carton Quantity
VT-750PP20K	20.0 kg Pail	-
VT-75020K	20.0 kg Carton	-
VT-750S	600 ml Sausage	20 / Carton




Features

- Formaldehyde free
- Fast setting
- Ultra-high solid content (Low water content and low shrinkage)
- Suitable for moisture sensitive timber
- Notched trowel ridges will hold firm



STAIRCASE

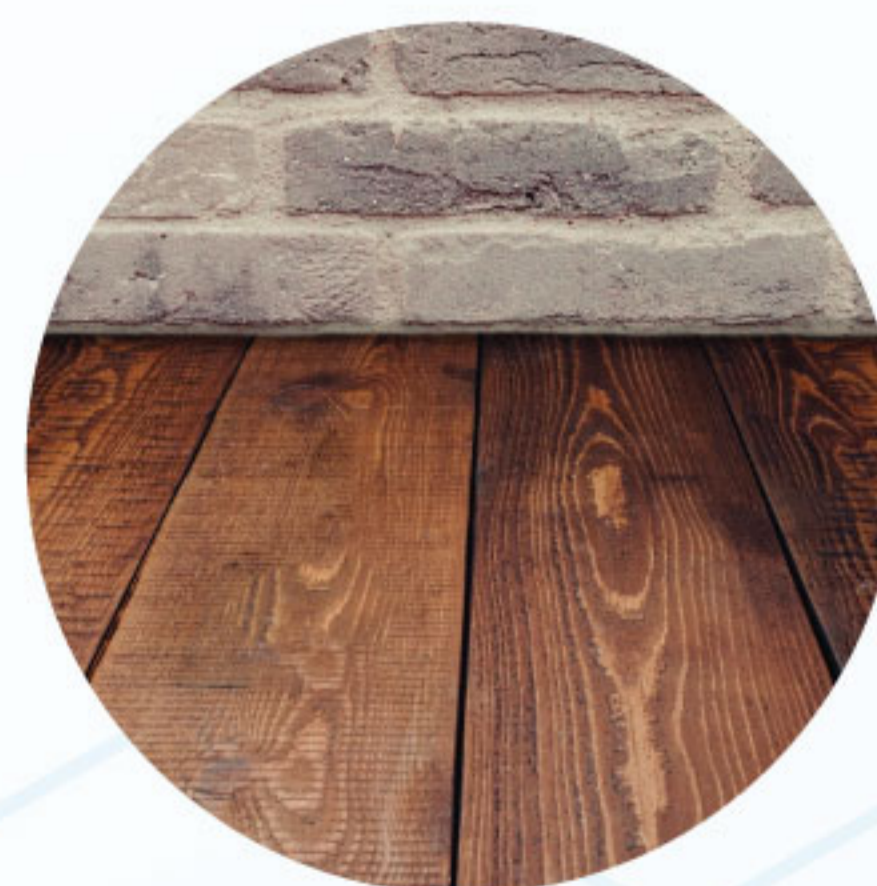

SOLID WOOD



VITAL TECHNICAL SDN. BHD. Co.No.: 200201021558 (589221-K)

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

www.vitaltechnical.com



A member of

