



Formulated For The Professionals

VT-752 Timberbond 752

Water-based Wood Flooring Adhesive

Timberbond 752 is a fast setting water-based adhesive featuring high solid content (low water content) thus suitable for bonding of various types of moisture sensitive timber in wood flooring applications. It is an easily trowelable thixotropic paste available in beige color. It dries to form a strong bond between timbers, and is resistant to normal hygrometric movements of wood and the thermal expansion of substrates.



Applications:

Ideal for the bonding of moisture sensitive timber in wood flooring applications, including parquet, industrial parquet and floorboards of all types of wood, multi-layer pre-finished parquet of small format. It may be used on cement-based screeds, wooden substrates, shipboard panels, Masonite panels etc.

Applicable Test / Standard:


- 1. Low VOC - USEPA Method 24 under SCAQMD rule 1168

Available color: Brown

Item Code	Content	Carton Quantity
VT-75220K	20.0 kg Recycled Pail	-
VT-75220K	20.0 kg Carton	-
VT-752PP20K	20.0 kg Pail	-

Features

- Fast setting
- High solid content (Low water content)
- Bonds moisture sensitive timber

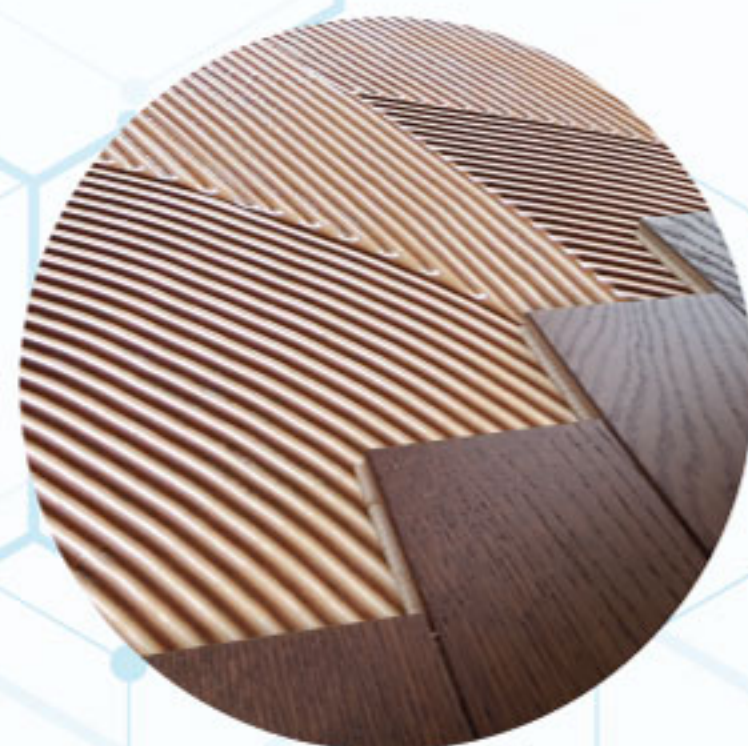

ENGINEERED WOOD FLOORING



TIMBER FLOORING



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP

