



Formulated For The Professionals

VT-756 Timberbond 756

Water-based Wood Flooring Adhesive

Timberbond 756 is a fast setting water-based adhesive featuring high solid content (low water content) thus suitable for bonding of various types of moisture sensitive timber in wood flooring applications. It is white colour before drying but will change into a clear and colourless dried film. It dries to form a strong bond between timbers, and is resistant to normal hygrometric movements of wood and the thermal expansion of substrates. It can be applied smoothly and easily and can be cleaned up with water.

Applications:

Ideal for the bonding of moisture sensitive timber in wood flooring applications, including parquet, industrial parquet and floorboards of all types of wood, multi-layer pre-finished parquet of small format. It may be used on cement-based screeds, wooden substrates, shipboard panels, Masonite panels etc.

Applicable Test / Standard:

1. Singapore Green Building Product Labelling Scheme (SGBPLS)
2. Low VOC - USEPA Method 24 SCAQMD Method 303-91 under SCAQMD rule 1168


Available colour: White (Wet) and Clear (Dry)

Item Code	Content	Carton Quantity
VT-756OV	500 g Bottle	24 / Carton
VT-75620K	20.0 kg Carton	-
VT-756PP20K	20.0 kg Pail	-



Features

- Certified Green Adhesive
- Fast setting
- High solid content (Low water content)
- Bonds moisture sensitive timber
- Dries clear
- Notched trowel ridges will hold firm

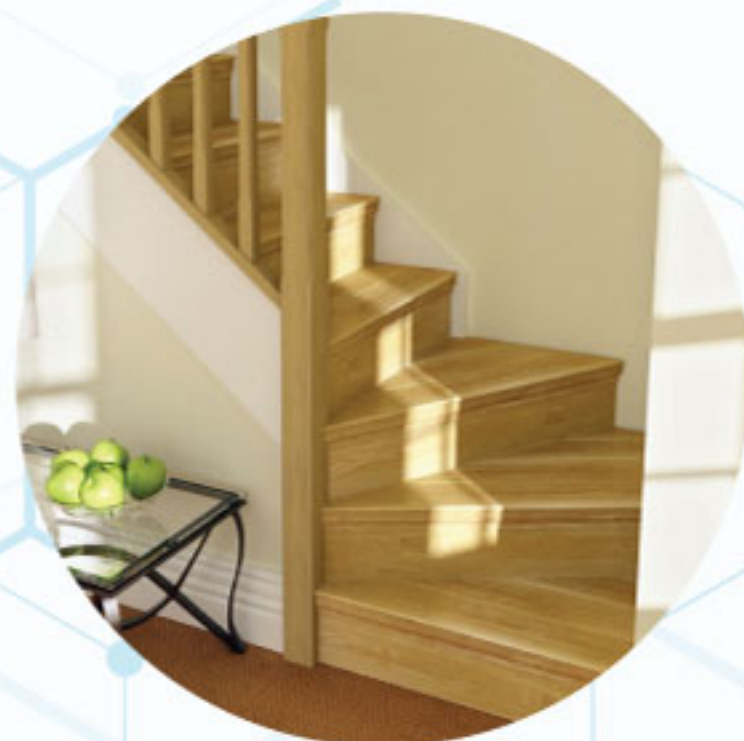

STAIRCASE



TIMBER FLOORING



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP

