



Formulated For The Professionals

VT-759 Timberbond 759

Water-based Wood Flooring Adhesive

Timberbond 759 is a fast setting water-based adhesive featuring medium solid content (medium water content) thus suitable for bonding of various types of moisture sensitive timber in wood flooring applications. It is white colour before drying but will change into a clear and colourless dried film. It dries to form a strong bond between timbers, and is resistant to normal hygrometric movements of wood and the thermal expansion of substrates. It can be applied smoothly and easily and can be cleaned up with water.

Applications:


Ideal for the bonding of moisture sensitive timber in wood flooring applications, including parquet, industrial parquet and floorboards of all types of wood, multi-layer pre-finished parquet of small format. It may be used on cement-based screeds, wooden substrates, shipboard panels, Masonite panels etc.

Available color: White (Wet) and Clear (Dry)


Item Code	Content	Carton Quantity
VT-759PP20K	20.0 kg Pail	-
VT-75920K	20.0 kg Carton	-

Features

- Fast setting
- Medium solid content (Medium water content)
- Bonds moisture sensitive timber
- Dries clear
- Notched trowel ridges will hold firm

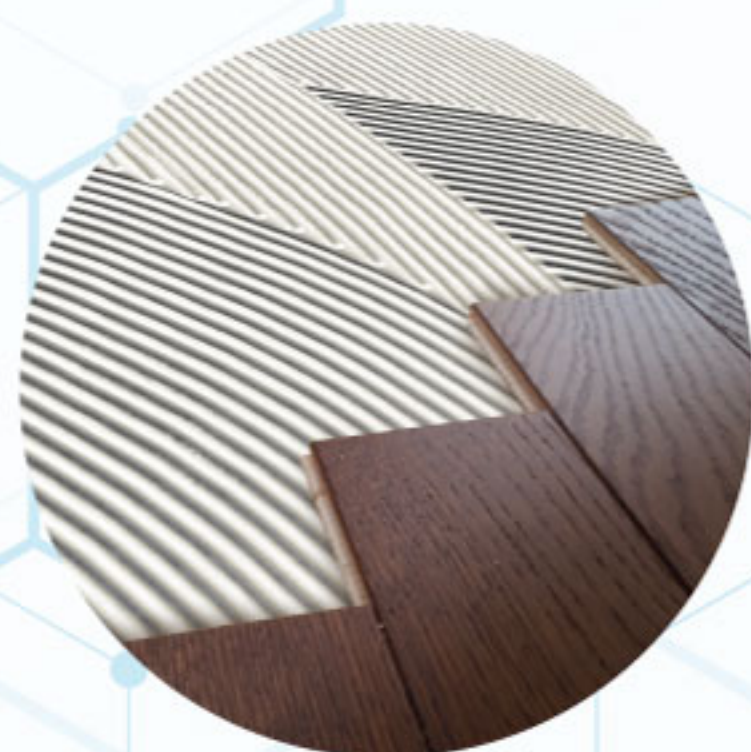

ENGINEERED WOOD FLOORING

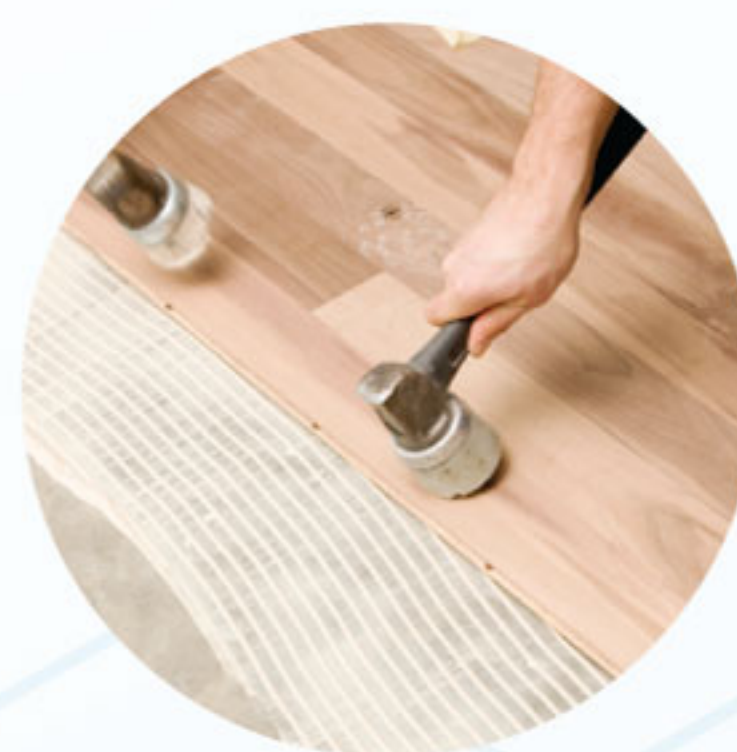

TIMBER FLOORING



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax) sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP

