



Formulated For The Professionals
Adhesives & Sealants

VT-630 MS Flooring Adhesive

Advanced MS Polymer

An eco-friendly wood flooring adhesive formulated with advanced MS Polymer technology, eliminating common problems associated with traditional polyurethane adhesives. It cures on exposure to atmospheric moisture, and quickly forms a tenacious but elastic bond on wood flooring and wall decorative materials. When cured, it is waterproof and is not adversely affected by exposure to moisture or water. Its elastic characteristic allows the wood floor to expand and contract without adhesion failures. The adhesive can be troweled easily. Its non-slump formula enables notched trowel ridges hold firm, bridging gaps between wood flooring and sub floor and reducing floor hollowness problem. Since it does not contain water or solvent, it will not cause dimensional changes in wood. It is also safe because it does not contain hazardous materials like isocyanate, and has a very low VOC content.

Applications:

Ideal for bonding wood floors to concrete, concrete screeds, cement / sand screeds, anhydrite screeds, plywood, cured leveling compounds, epoxy membrane, OSB (underlayment grade), particle board, gypsum board, ceramic tiles, stone, terrazzo, radiant heated subfloors, metal decking, steel, aluminum etc.

Applicable Test / Standard:

1. Leadership in Energy and Environmental Design (LEED) v4.1 EQ compliant
2. Low VOC - USEPA Method 24 under SCAQMD Rule 1168


Available colour: Light brown.

| Item Code | Content | Carton Quantity |
|-----------|------------------------------|-----------------|
| VT-63015K | 15 kg Pail (2 x 7.5 kg Pack) | - |
| VT-63016K | 16 kg Pail (2 x 8 kg Pack) | - |
| VT-63024K | 24 kg Pail (3 x 8 kg Pack) | - |
| VT-630S | 600 ml Sausage | 20 / Carton |



Features

- Certified Green Sealant Adhesive
- Single-component
- Resistant to aging
- Free of water, 100% solid content
- Free of solvent
- Free of isocyanate
- Low odor & low VOC
- Notched trowel ridges hold firm
- Rapid strength build-up and short curing time
- Easy surface clean up
- Non-flammable, non-hazardous, stable shelf life

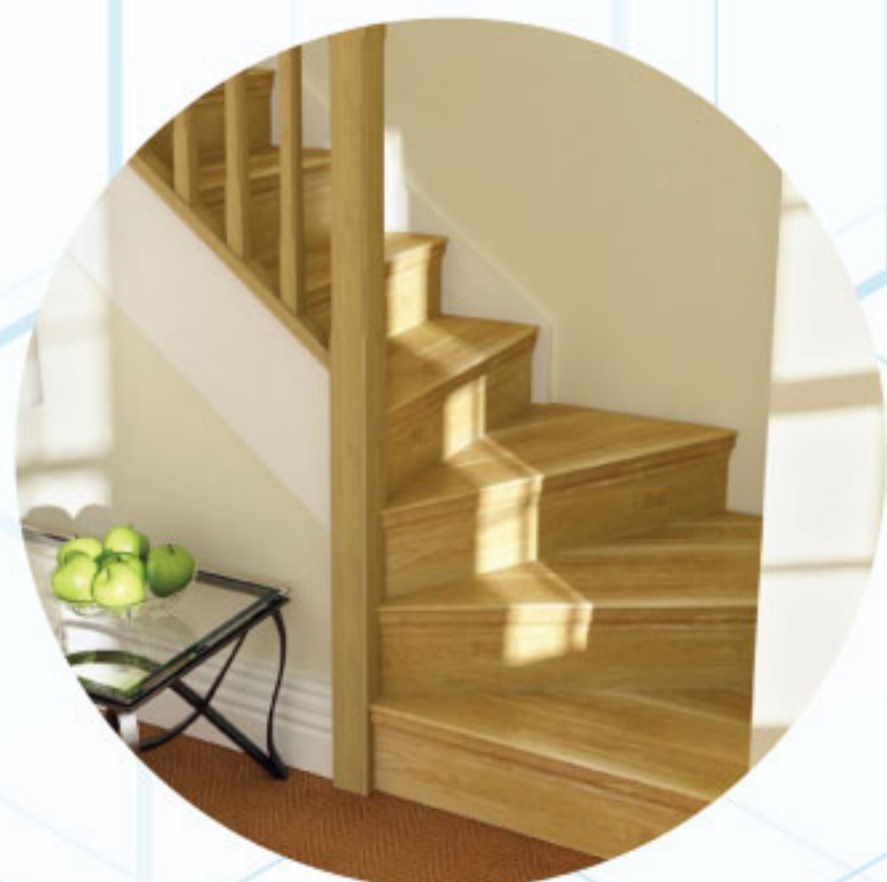

STAIRCASE



WOOD FLOORING



VITAL TECHNICAL SDN. BHD. Co.No.: 200201021558 (589221-K)

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

www.vitaltechnical.com



A member of

