



Formulated For The Professionals
Adhesives & Sealants

VT-220 / VT-220S Seal-All-Gaps

General Purpose Water-based Acrylic Sealant

A one-component, paintable and flexible acrylic sealant formulated for sealing gaps and joints where slight movements or vibration, if occurred, could cause conventional, non-elastic fillers and putties to crack and fall off. It is environmentally friendly, and its adhesion to most porous substrates is good even without primer. It can be cleaned up with water.

Applications:

General sealing applications (door and window joints, cabinet and wardrobe installation, skirting of wood flooring, etc.). Suitable for various substrates (metal, PVC, wood, concrete, gypsum boards, reinforced cement boards, marble, etc.).

Applicable Test / Standard:

- Leadership in Energy and Environmental Design (LEED) IEQ 4.1 compliant
 - Low VOC Content - USEPA Method 24 and USEPA Method 310 under SCAQMD rule 1168
 - Low VOC Emission - CDPH Standard Method v1.2- 2017
- ASTM C920, Type S, Grade NS, Class 25, Use NT, A & M
- RoHS I & II and SVHC

Standard Colours: White


Special Colours: Brown, Black, Dark Bronze, Grey Bosney, Dark Grey, Maple, Oak and Cherry
(Made-to-Order)

| Item Code | Content | Carton Quantity |
|-----------|-----------------|-----------------|
| VT-220 | 450 g Cartridge | 24 / Carton |
| VT-220S | 900 g Sausage | 20 / Carton |



Features

- ±25% Movement capability
- APEO-, Formaldehyde- and Phthalate- free
- Paintable
- Permanently flexible
- Easy clean up

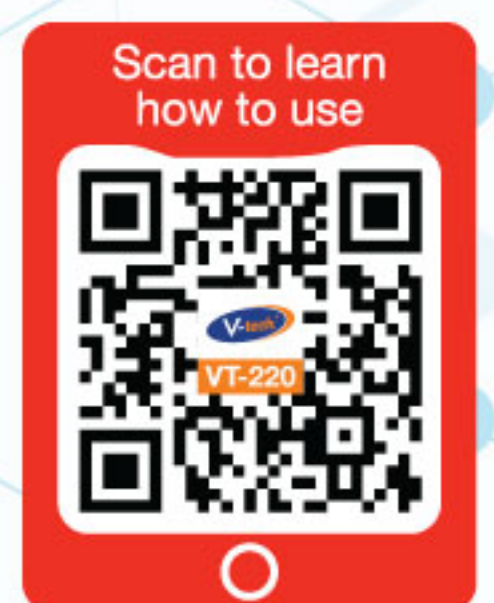

GAP BETWEEN
WALL & CABINET



JOINTS AROUND
WINDOWS



PENETRATION
GAP SEALING



VITAL TECHNICAL SDN. BHD. Co.No.: 200201021558 (589221-K)

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

www.vitaltechnical.com



A member of

NIPPON PAINT

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.