



Formulated For The Professionals
Adhesives & Sealants

VT-382 Low VOC Sprayable Contact Adhesive

Contact Adhesive

VT-382 Low VOC Sprayable Contact Adhesive is a Low VOC (Volatile Organic Compound) synthetic rubber adhesive compliant with South Coast Air Quality Management District (SCAQMD) rule 1168. It helps to reduce Indoor Air Quality contamination, and ozone depletion. It bonds a variety of common sheet materials, easy to spread and it grabs immediately upon contact. It is easy to use and offers good bonding strength.

Applications:

Ideal for bonding of laminate, rubber, cork, leather, fiberglass, polyurethane foam, EVA to wood, metal or concrete. It is also suitable for carpet installation.

Applicable Test / Standard:


1. Low VOC - USEPA Method 24 SCAQMD Method 303 under SCAQMD rule 1168
 2. Toluene: EU REACH Annex XVII Entry 48
- Formaldehyde: Singapore NEA control of formaldehyde in paints under EPMA

Available colour: Yellow



Features


- Excellent adhesion
- Bonds most materials
- Low VOC compliant
- Toluene & Formaldehyde-free

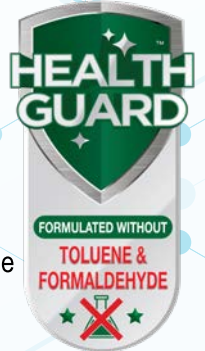

LAMINATE



DUCTING INSULATION

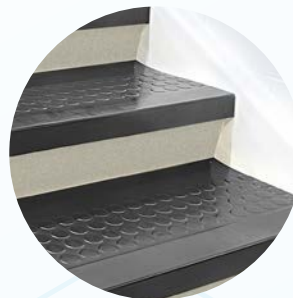

RUBBER STAIR TREADS



VITAL TECHNICAL SDN. BHD. Co.No.: 200201021558 (589221-K)

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

www.vitaltechnical.com



A member of

NIPPON PAINT