



# VT-222 All Purpose Gap Sealant VT-226 GP Gap Sealant

## Original Water-based Acrylic Sealant

A versatile, environmentally friendly acrylic sealant for all purpose caulking and sealing applications. It is paintable and has good adhesion to most porous surfaces. It is formulated with the right consistency thus able to withstand pressure during the installation. It is suitable for sealing gaps and joints where slight movements or vibration, if occurred, could cause conventional, non-elastic fillers and putties to crack and fall off. It can be applied smoothly and easily and can be cleaned up with water.

### Applications:

General sealing applications: door and window joints, cabinet and wardrobe installation, skirting of wood flooring, etc. Suitable for various substrates: metal, PVC, wood, concrete, gypsum boards, reinforced cement boards, marble, etc.

### Applicable Test / Standard:

1. ASTM C920 & ASTM C719, Type S, Grade NS, Class 12.5, Use NT, M
2. Low VOC - USEPA Method 24 and SCAQMD Method 304-91 under SCAQMD Rule 1168

Available colour: White

Item Code	Content	Carton Quantity
VT-222	450 g Cartridge	24 / Carton
VT-226	450 g Cartridge (GW)	24 / Carton



VT-222

VT-226

### Features

- $\pm 12.5$  % movement capability (VT-222)
- Paintable
- Economical
- Versatile & permanently flexible
- Easy clean up with water




PARTITION TO  
WALL GAP



PERIMETER  
SEALING



GAP BETWEEN  
WALL & CABINET

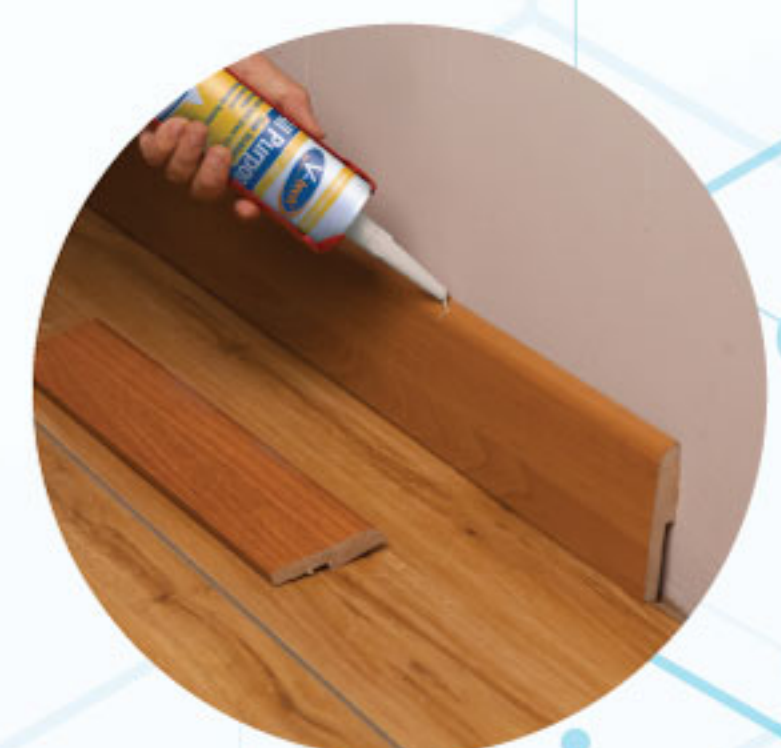

WOOD  
SKIRTING



**VITAL TECHNICAL SDN. BHD.** (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP

