



Formulated For The Professionals  
Adhesives & Sealants

# VT-232 Eco Nails

## Construction Adhesive Sealant

A one-component, low-VOC (comply with SCAQMD rule #1168), paste-like construction adhesive sealant formulated to bond a variety of common construction materials. It has strong initial grab, superior adhesion and will not slump on vertical surfaces. It is suitable for heavy duty general construction, remodeling, maintenance and repair projects.

**Applications:** Ideal for bonding of skirting boards of wood and PVC, particleboard, masonry, aluminum, galvanized iron, steel, concrete, fibrous cement sheeting, wall brick, concrete and floor panels. It is recommended for bonding pedestals of raised access floors to cement floor screed, whereby the adhesion in this application is shown excellent in CISCA 2007- Section 6: Pedestal Overturning Moment Test.


### Applicable Test / Standard:

1. Leadership in Energy and Environmental Design (LEED) v4.1 EQ compliant
2. Singapore Green Building Product Labelling Scheme (SGBPLS) certified
3. Tested with CISCA 2007- Section 6: Pedestal Overturning Moment Test
4. Low VOC - USEPA Method 24 and SCAQMD Method 303-91 under SCAQMD Rule 1168

**Limitation:** Not recommended for Mirror & Polystyrene (Styrofoam).

**Available colour:** Light Brown

Item Code	Content	Carton Quantity
VT-232	350 g Cartridge	24 / Carton
VT-2325K	5.0 kg Pail	4 / Carton

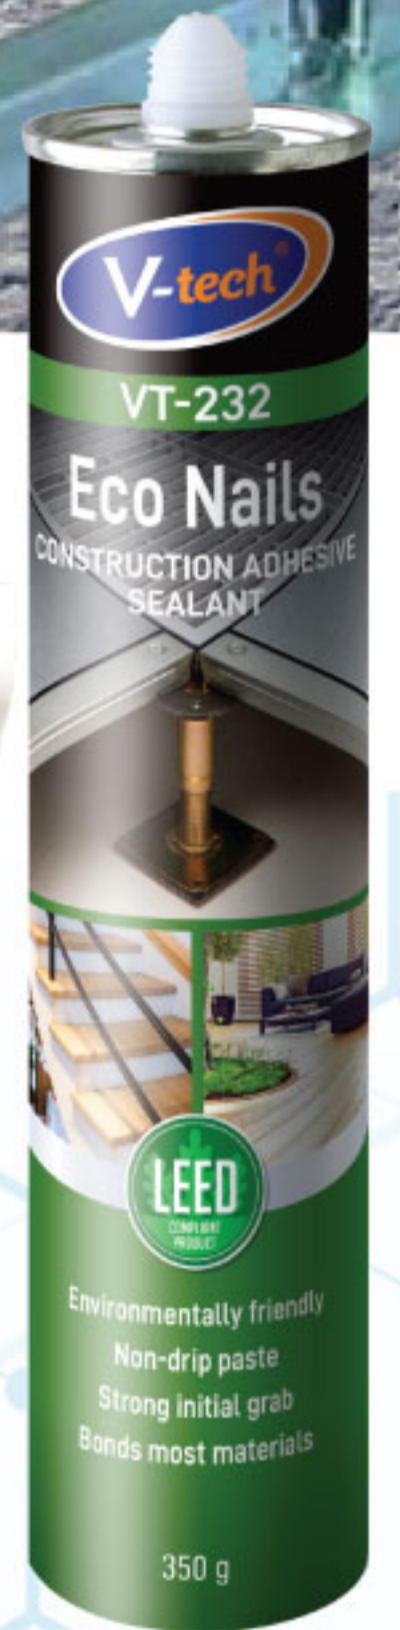

### Features

- APEO-, Formaldehyde- and Phthalate- free
- Strong initial grab
- Non-drip paste
- Bonds most materials



STAIRCASE



RAISED ACCESS FLOOR



GREEN BUILDING INDOOR BONDING



VITAL TECHNICAL SDN. BHD. Co.No.: 200201021558 (589221-K)

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

www.vitaltechnical.com



A member of

