



Formulated For The Professionals

VT-260S LM PU Sealant

Low Modulus Polyurethane Sealant

A one-component, low modulus polyurethane sealant formulated for construction joint sealing applications. It will bond to form a durable, flexible seal capable of cyclic expansion and compression movement of 50 % (± 25 %) of the original width. It is virtually unaffected by normal weathering conditions such as rain, UV radiation, snow, atmospheric contamination and pollution etc.

Applications:

Well-suited for in situ concrete, precast and tilt up panels, brick & block-work, plaster board, aluminum windows, granite, sandstone and marble, GRC, fiberglass & specialty systems, metal curtain wall, water tank etc.

Applicable Test / Standard:

1. Low VOC - USEPA Method 24 under SCAQMD Rule 1168
2. Sirim Test – ASTM D 412 – 1998a

Available colours: White and Grey

Item Code	Content	Carton Quantity
VT-260S	600 ml Sausage	20 / Carton




Features

- Durable and flexible
- Non-staining
- Paintable



DOOR & WINDOW
PERIMETER SEALING

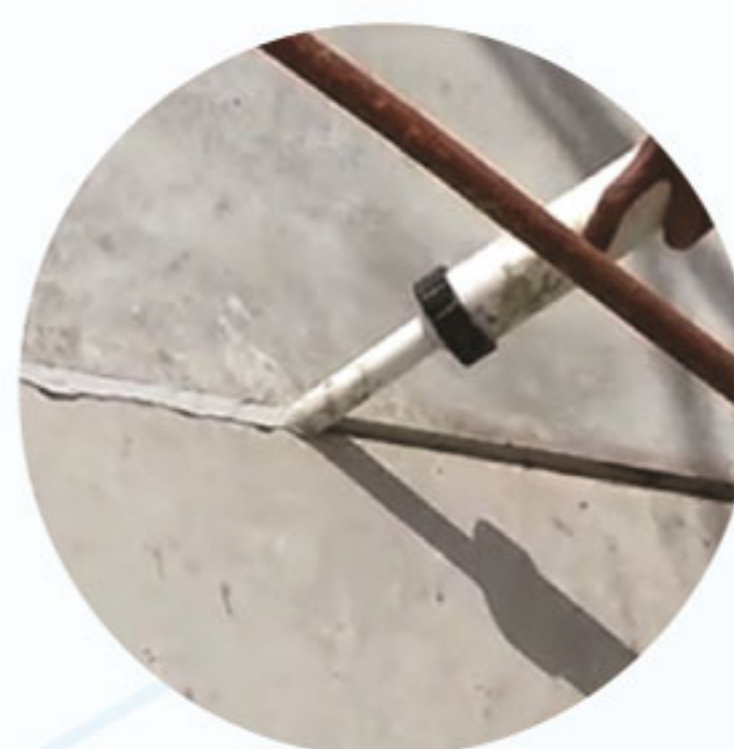

CONCRETE
JOINT



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax) sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP



www.vitaltechnical.com