

joints and seams, thereby effectively blocks the infiltration of gases, dust and other contaminants and the exfiltration of conditioned air. It is able to accommodate minor vibration and movement, stays flexible and does not

crack. Excellent coverage rates can be achieved with easy brush-on application, hence provides low installation cost. Can be easily applied by brush, trowel, hand, spray or extrusion.

Applications:

Ideal for sealing fabricated joints and seams of sheet metal air ducts, fiberglass duct board, thermal insulation, crawl space vapor barriers, house wrap, and other types of air ducts.


Available colour: Light grey

Item Code	Content	Carton Quantity
VT-2824K	4.0 kg Pail	4 / Carton
VT-28218K	18.0 kg Pail	-
VT-28225K	25.0 kg Pail	1-1

Features

- Fast cure
- Economical
- Slump resistant
- Minimal shrinkage
- High solid content
- Excellent workability
- Crack and peel resistant
- Indoor and outdoor usage




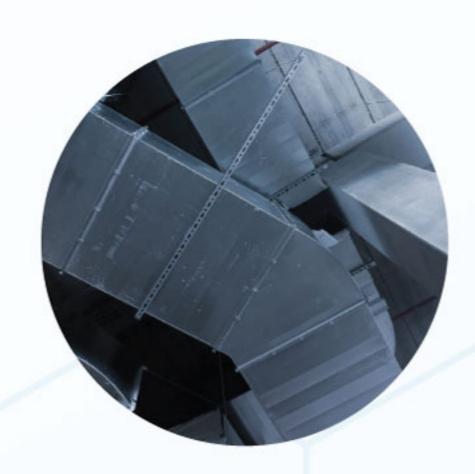



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.



sales@vitaltechnical.com







