



Formulated For The Professionals

VT-286 Water-based Duct Sealant

Duct Sealant

VT-286 is a water-based indoor/outdoor air duct sealant for sealing fabricated joints and other types of air ducts. It performs as a tough and flexible adhesive and sealant on the joints and seams, thereby effectively blocks the infiltration of gases, dust and other contaminants and the exfiltration of conditioned air. Excellent coverage rate can be achieved with easy brush-on application, which helps reduce installation cost. The thixotropic consistency of the sealant allows easy application by brush, trowel, hand, spray or extrusion. It is compliant with FDA 21 CFR 177.2600 (e) & (f). It is also compliant to the requirements of Leadership in Energy and Environmental Design (LEED) v4 EQc2: Complies with both VOC emission and VOC content.



Applications:

Ideal for sealing fabricated joints and seams of sheet metal air ducts, fiberglass duct board, thermal insulation, crawl space vapor barriers, house wrap, and other types of air ducts.

Applicable Test / Standard:


- LEED v4 EQc2 compliant
 - Low VOC Content - USEPA Method 24 and SCAQMD Method 304-91 under SCAQMD Rule 1168
 - Low VOC Emission - CDPH Standard Method v1.2- 2017
- FDA 21 CFR 177.2600 (e) & (f).

Available colour: Grey

Item Code	Content	Carton Quantity
VT-2864K	4.0 kg Pail	4 / Carton
VT-28620K	20.0 kg Pail	-

Features

- Low VOC and low odour
- Food Contact Safe
- Paintable
- Excellent workability
- Crack and peel resistant
- Slump resistant
- High solid content

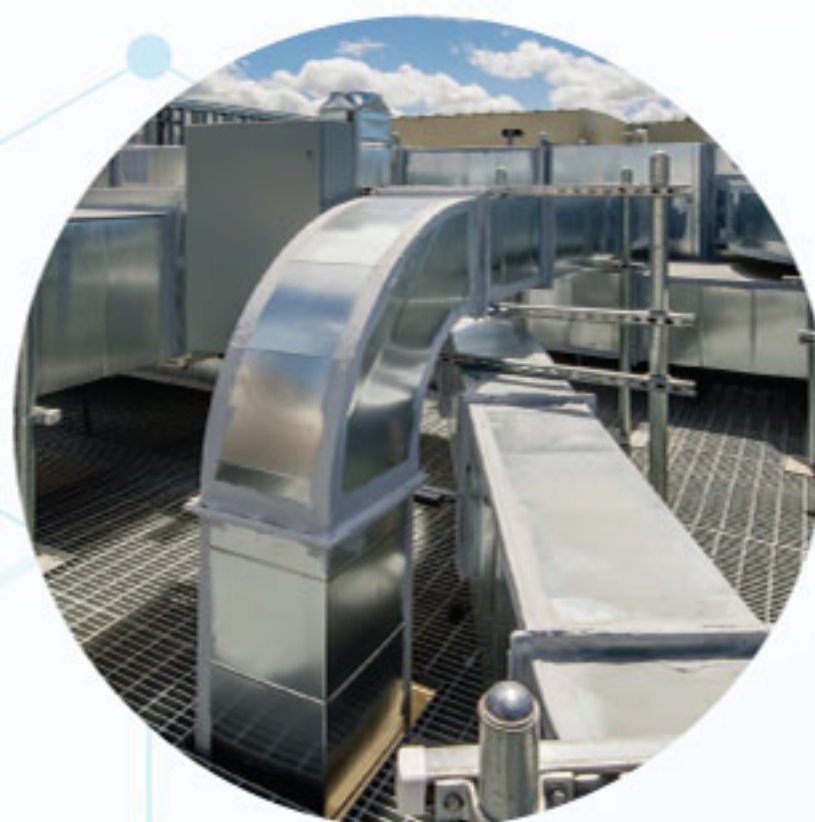

VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP

