



Formulated For The Professionals
Adhesives & Sealants

VT-288 Fire Rated Duct Sealant

Duct Sealant

VT-288 Fire Rated Duct Sealant is a fire resistive, water-based indoor/outdoor air duct sealant. It performs as a tough and flexible adhesive and sealant on the joints and seams, thereby effectively blocks the infiltration of gases, dust and other contaminants and the exfiltration of conditioned air. It is able to accommodate minor vibration and movement, stay flexible and does not crack. It has been tested to meet the requirements of UL94 HB Flammability Test. It also complies with the requirements of Leadership in Energy and Environmental Design (LEED) v4.1 EQ Credit: Low Emitting Materials.



Applications:

Ideal for sealing fabricated joints and seams of sheet metal air ducts, fibreglass duct board, thermal insulation, crawl space vapour barriers, house wrap, and other types of air ducts.

Applicable Test / Standard:

1. UL 94 HB. Horizontal Burning Test
2. Leadership in Energy and Environmental Design (LEED) v4.1 EQ compliant
 - Low VOC Content - USEPA Method 24 and SCAQMD Method 304-91 under SCAQMD Rule 1168
 - Low VOC Emission - CDPH Standard Method v1.2- 2017



Available colour: Grey

Item Code	Content	Carton Quantity
VT-2884K	4.0 kg Pail	4 / Carton
VT-28820K	20.0 kg Pail	-
VT-288	300 ml Cartridge	24 / Carton

Features

- Fire resistive
- Certified Green Sealant
- Low VOC and low odour
- Excellent workability
- Crack and peel resistant
- Slump resistant
- High solid content





VITAL TECHNICAL SDN. BHD. Co.No.: 200201021558 (589221-K)

+603 6094 2088 (Tel) +603 6099 2930 (Fax)

sales@vitaltechnical.com

www.vitaltechnical.com

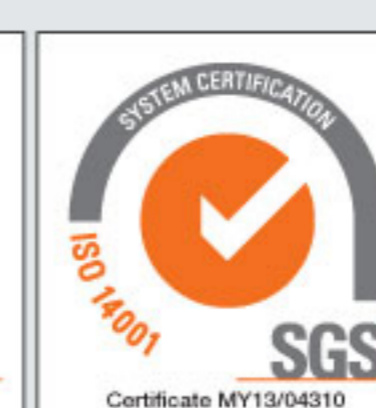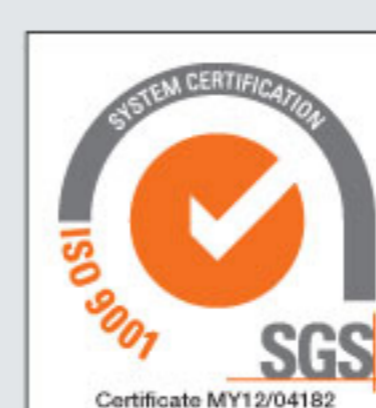

A member of

