



Formulated For The Professionals

VT-580 Heavy Duty Paint Remover

Paint Remover

VT-580 Heavy Duty Paint Remover which penetrates into successive coats of paint, varnish or enamel. It is super strong and fast reacting yet non caustic hence will not damage bared surfaces. It is highly viscous and can be applied on vertical surfaces. It also contains surfactant which improves penetration of the paint remover.

Applications:

Removes coating from metal, wood, plaster and glass. Removes enamel paints, varnishes and bitumen. Can also soften acrylic paints and glue.

Available color: Clear

How to use:

1. Apply a thick coat onto painted surfaces with a brush.
2. Leave it for 10 minutes to react with the paint.
3. Remove the softened paint with a scraper.


* Use only in well ventilated areas. Do not inhale fume.




Features

- Non-caustic
- Cost effective
- Super strong and fast reacting
- High viscosity
- Works on vertical surfaces

Item Code	Content	Carton Quantity
VT-580500	500 ml Tin	24 / Carton
VT-5801L	1.0 L Tin	12 / Carton
VT-5803L5	3.5 L Tin	6 / Carton

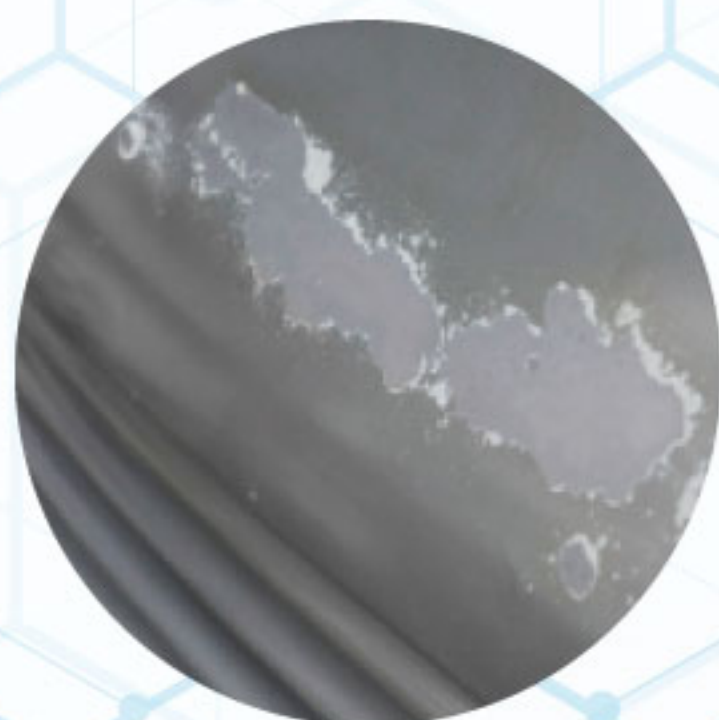

CAR BODY

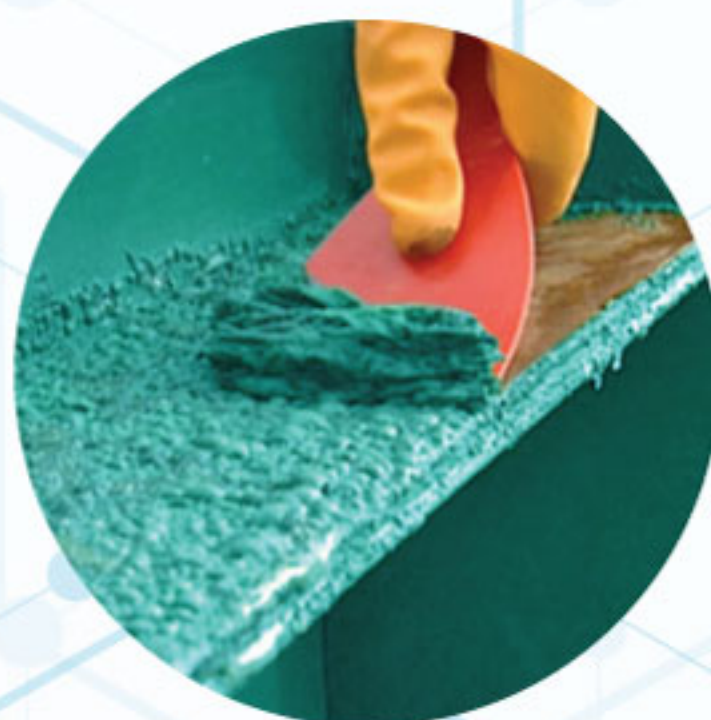

WOODEN FURNITURE



ALLOY WHEEL



METAL GATE



POWDER COATING HOOK



VITAL TECHNICAL SDN. BHD. (No.: 589221-K)

No, 93, Jalan Industri 3/3, Rawang Integrated Industrial Park, 48000 Rawang, Selangor Darul Ehsan, Malaysia.

+603 6094 2088 (Tel) +603 6099 2930 (Fax) sales@vitaltechnical.com

A MEMBER OF THE NIPPON PAINT GROUP

